


OSC 92UL CAPXS, TD-100, 400, TM-L Explosion Proof Mesuring


<Features>

-In combination with various system devices, not only weighing but also control and communication can be done freely.

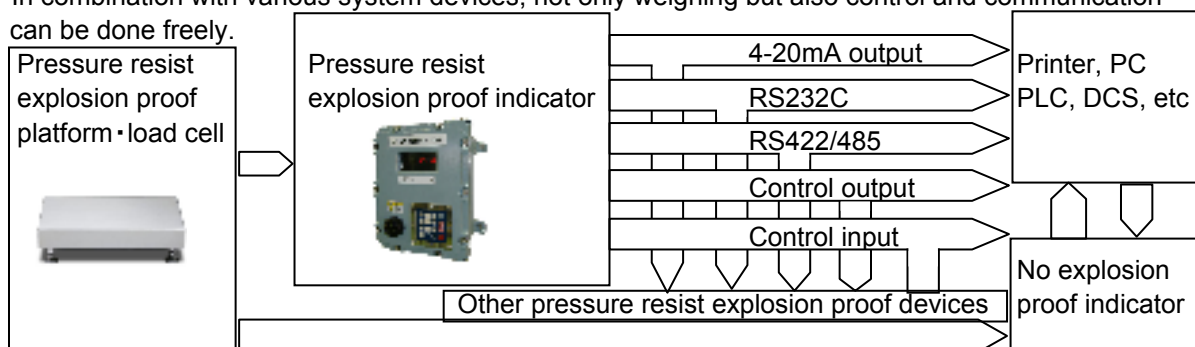


Platform

-**CAPXS** Compact intrinsically safe type




Explosion proof performance
ExibII CT2 II CT4

-**TD-400** single point type



Explosion proof performance
ExdII BT4

-**TD-100** 1 point load cell type



Explosion proof performance
d2G4

-**TM-L** 4 point multi load cell type



Explosion proof performance
d2G4

Weight (Kg)	Division (kg)	Dimention (mm)	Height (mm)	Cover	Line-Up			
					CAPXS	TD-400	TD-100	TM-L
3	0.001	240×340	82	SUS304	○	-----	-----	-----
6	0.002	240×340	82	SUS304	○	-----	-----	-----
15	0.005	240×340	82	SUS304	○	-----	-----	-----
30	0.01	290×375	140	SUS304	-----	○	-----	-----
		520×520	220	SUS304	-----	-----	○	-----
60	0.02	290×375	140	SUS304	-----	○	-----	-----
		520×520	220	SUS304	-----	-----	○	-----
150	0.05	390×530	170	SUS304	-----	○	-----	-----
		600×700	220	SUS304	-----	-----	○	○
300	0.1	600×700	220	SUS304	-----	○	-----	○
		900×900	220	SUS304	-----	-----	○	○
600	0.2	600×700	220	SS400	-----	◎	-----	◎
		900×900	250	SS400	-----	-----	○	◎
		1200×1200	250	SS400	-----	-----	○	◎
1000	0.5	1200×1200	320	SS400	-----	-----	◎	◎
		1500×1500	320	SS400	-----	-----	◎	◎
1500	0.5	1200×1200	320	SS400	-----	-----	◎	◎
		1500×1500	320	SS400	-----	-----	◎	◎
2000	1	1200×1200	320	SS400	-----	-----	◎	◎
		1500×1500	320	SS400	-----	-----	◎	◎
		1800×1800	350	SS400	-----	-----	◎	◎
3000	1	1200×1200	350	SS400	-----	-----	◎	◎
		1500×1500	350	SS400	-----	-----	◎	◎
		1800×1800	450	SS400	-----	-----	◎	◎