


OSC 92UL TEX0707 Pressure resist explosion proof CC-Link unit

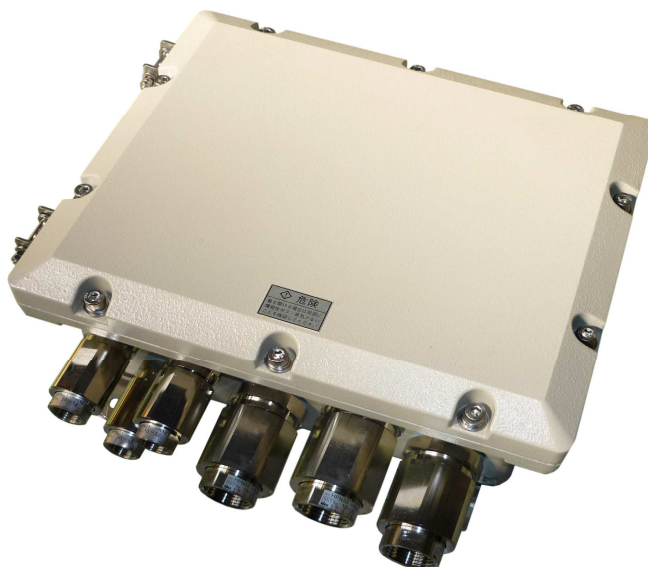

<Features>

- CC-Link unit is stored in explosion proof box
- I/O of PLC can be extended in dangerous site

<Specifications>

-Wiring lead-in bracket

Model	Applicable cable Diameter	Applicable conduit Size	Q'ty
HPN21R12	10~12 mm	G1/2(16)	3
HPN33R20	18~20 mm	G1(28)	3

-Standard internal unit

CC-Link Input Unit	AJ65SBTB1-32D (32 points General common)
OC-Link Output Unit	AJ65SBTB2N-16R (18 points relay output genera common)
Power Source	PS5R-D24 (IDEC) Input voltage 100~240V 50/60 Hz Output 24VDC 50W
Circuit Protector	NRAS2100 (IDEC)

-Up to 3 sets of CC-Link unit can be connected.

-Free combination between AJ65SBTB1-32D and AJ65SBTB2N-16R possible

